

	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
1.0	GENERAL		
1.1	Gas Generator Quantity	02	Complied
1.2	Gas Generator Tags	G-4101-01A/B	Complied
1.3	Make & Model Number of Alternator	VTA	MECCALTE ECO43-IM/4
1.4	Country of Origin of Alternator	VTA	UK
1.5	Make & Model Number of Engine	VTA	Baudin 12M33Z10N0/5
1.6	Country of Origin of Engine	VTA	China
1.7	Acoustic & Weatherproof enclosure	Required	Complied
1.8	CO2 Fire Suppressing System as per NFPA	Required	Complied
1.9	Design Life	06 years	Complied
1.10	International Codes and Standards [Refer: Attachment-1]	Compliance Required As Applicable	Complied
1.11	Vendor Deviation Form [Refer Attachment-2]	Vendor shall fill in the attached form in case of any deviation	No Deviation
1.12	Site Conditions [Refere Attachment-3]	Compliance Required As Applicable	Complied
1.13	Vendor Documents List [Refer Attachment-4]	Compliance Required	Complied
1.14	Gas Gensets Operation: Parallel Generator Control Relay shall have provision of manual and automatic switching from one unit to the other after defined time	Compliance Required	Complied
2.0	SITE & INSTALLATION CONDITION		
2.1	Area of Installation (Indoor/Outdoor)	Outdoor	Complied
2.2	Area of Classification (Hazardous / SafeArea)	Safe Area	Complied
2.3	Design Ambient Temperature - Maximum	58 Deg C	55 Deg C
2.4	Design Ambient Temperature - Minimum	05 Deg C	Complied
2.5	Altitude Above Mean Sea Level	Less than 1000 meters	Complied
2.6	Ambient Conditions	Dusty & humid	Complied
3.0	DESIGN PARAMETERS FOR ENGINE		
3.1	Type of Design	VTA	Air To Water Cooled Closed Loop
3.2	Applicable Standard	ISO	Complied
3.3	Rated Continuous Power at Site Ambient Temperature (kW)	525 kW @ 0.8 pf	700kW @ 0.8pf
3.4	Rated Speed (RPM)	VTA	1500
3.5	Number of Strokes	VTA	4
3.6	Direction of Rotation from Drive End	CCW	CCW
3.7	Overload Capability	110% of Rated Power	110% for 1 hour
3.8	Exhaust Gas temperature:		
3.9	a) At outlet of cylinder	VTA	564 Deg C
3.10	b) Upstream turbo charger	VTA	Shall be advised after project award
3.11	Cooling System	Air Cooled Horizontal Radiator or alternate as per Vendor Design	Air To Water Cooled Closed Loop
3.12	Type of Starting Mechanism	Electric Start with Battery Backup	Sealed Lead Acid Battery

	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
3.13	Maximum Noise Level measured at 1 Meter distance from the enclosure	85 dB (A)	Complied
3.14	Time Required for Start from Cold Conditions	VTA	Usual starting time 90 seconds Full Load operation 3 min
3.15	Type of Fuel	Fuel Gas H2S Content: 50 ppm	Complied
3.16	Fuel Consumption at Rated Voltage	VTA	Shall be advised after project award
3.17	Cylinder Arrangement	VTA	V Type
3.18	Bore, mm	VTA	150
3.19	Compression Ratio	VTA	39.2
3.20	Instruments: Orifice Type Fuel Gas Metering Instrument [Separate for each unit] Lube Oil Hight Temperature Over Speed Vibration Lube Oil Temperature Others As per Vendor Standard Design & Monitoring and Protection	Required	Complied
3.21	Control: Mechanical Tachometer Lube Oil Pressure Gauge Water Temperature Gauge Running Manifold Vaccum Gauge Running Time Meter Start/Stop Control Exhaust Gas Temperature Cooling Water Pressure Others As per Vendor Standard Design	Required	Complied
3.22	All measurements and control shall be provided to the DCS through redundant RS485 communication link	Required	Complied
3.23	Lube Oil System	Required	Complied
3.24	Engine Exhaust System with Silencer	Required	Complied
3.25	Shaft Couplings	Required	Complied with flexible coupling
3.26	Torsional Analysis of Engine	Required	Complied
4.0	FUEL GAS		
4.1	Fuel Gas Pressure	7 barg	Complied
4.2	Min / Max Pressure	VTA	0.020~0.070 bar with pressure reduction module/skid
4.3	Size of fuel line	VTA	2inhc
4.4	Emergency push button	VTA	Complied
4.5	Lubrication consumption	VTA	<0.3 g/kw/hr
4.6	Maximum Number of Continuous Operating Hours without maintenance interval (Hours)	VTA	Shall be advised after project award
4.7	Duration of Shutdown for Routine maintenance after above Interval	VTA	3~4 hours
4.8	Starting type	VTA	Electric Start
4.9	NOx after SCR (selective catalytic reduction treatment	As per Scope of Work	Complied


	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
4.10	Exhaust Gas Treatment System	Incompliance to Sox Nox Project Specification, if required	Complied
5.0	DESIGN PARAMETERS - ALTERNATORS		
5.1	Rating capacity	525 kW@ 58 Deg C	700kW @ 0.8pf
5.2	Rated Voltage (V)	415V	Complied
5.3	Rated current	VTA	1600Amp
5.4	Number of Phases	3P+4W	Complied
5.5	Rated Power Factor	0.8	Complied
5.6	Rated Frequency (Hz)	50	Complied
5.7	Rated Speed	VTA	1500
5.8	Stator Connection	Star Connection	Complied
5.9	Generator Duty	S1	Complied
5.10	Rotation facing Drive End	VTA	CCW
5.11	Winding Insulation- Generator & Exciter	Class H	Complied
5.12	Protection method	IP 23	Complied
5.13	Temperature rise	Class F	Complied
5.14	Overload Capability	VTA	110% for 1 hour
5.15	Generator Efficiency (%) - at unity powerfactor:	VTA	95.30%
5.16	3 Phase short circuit withstand time	3s	Complied
5.17	Recovery time to rated voltage	VTA	Shall be advised after project award
5.18	Speed control	Electronic Governor	Complied
5.19	Type of Excitation Self excitation, Brushless type, consisting of a main AC exciter and a permanent magnet generator direct coupled and air cooled	Required	Complied
5.20	Excitation - Rated Current At least 110% of the excitation current at the rated output of the generator under the most stringent operating conditions	Required	Complied
5.21	Excitation - Rated Voltage At least 110% of the rotor voltage at the rated output of the generator under the most stringent conditions	Required	Complied
5.22	Winding temperature detectors (No & type)	2 RTD per Phase, PT-100 platinum resistance elements as per IEC	Complied
5.23	Bearing temperature detectors (No & type)	2 RTD per Phase, PT-100 platinum resistance elements as per IEC	Complied
5.24	Common Engine / Generator control panel	Required	Complied
5.25	AMF [Auto Main Failure] Panel	Integrated with Control Panel or Separate as per Vendor standard design	DEEPSEA Controller DSE8610 is supplied for parallel operation as required
5.26	Design Temperature (°C)	58 Deg C	55 Deg C
5.27	Manufacturer / Type / country of origin -Exciter	VTA	UK
5.28	Manual control setting	Required	Complied
5.29	Automatic control setting	Required	Complied

		ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009		Rev.: A		
DATASHEET - GAS POWER GENERATOR				
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER	
5.30	Steady state voltage adjuster	Required	Complied with HMI of the relays and remote control panel interface	
5.31	CT Protection Class	5P20	Complied	
5.32	Differential CT [Current Transformer]	As per Vendor Standard Protection Scheme	Not required for generator less than 5MW	
5.33	CT Measuring Class	Class 1	Complied	
5.34	Voltage regulator	VTA	Complied	
5.35	Cooling method	Fan Cooling	Complied	
5.36	Installation method	IM B3	Complied	
5.37	Bearing structure	VTA	Thrust Bearing	
5.38	Overall weight	VTA	22~25 Ton	
5.39	Moment of inertia	VTA	Shall be advised after project award	
5.40	Parallel operation	Required	Complied	
5.41	Transient voltage adjustment rate	VTA	Shall be advised after project award	
5.42	Overload Capability	VTA	110% for 1 hour	
5.43	Over current Capability	VTA	110%	
5.44	Short-circuit current capability	VTA	25kA; shall be reconfirmed after project award as per actual design	
5.45	Voltage Variation	±10%	Complied	
5.46	Frequency Variation	±5%	Complied	
5.47	Terminal Boxes Separate terminal boxes shall be provided for: 1. Stator connections and Stator star point connections 2. Heater connections 3. Exciter connections 4. RTD connections 5. CT connection 6. Other connections	VTA	Confirmed	
5.48	Anti-condensation Heaters	Required	Complied	
6.0	GENERATOR CONTROL PANEL			
6.1	Dimension	VTA	Shall be advised after project award	
6.2	Generator Breaker Make	VTA	Schneider/ABB	
6.3	Generator Breaker Type	ACB [Motorized]	ACB [Motorized]	
6.4	Generator Breaker Rating	Min 1250Amp	1600	
6.5	Breaking Capacity	VTA	Shall be advised after project award	
6.6	Breaker Closing Time	VTA	Shall be advised after project award	
6.7	Breaker Tripping Time	VTA	Shall be advised after project award	
6.8	Remote Circuit Breaker On/Off Command and Interface	Required	Complied	
6.9	Automatic Starting and Synchronization	Required	Complied	
6.10	Raise/Lower Voltage Regulator	Required	Complied	
6.11	Voltage Input Interface from Switchgear for Synchronization	Required	Complied	
7.0	RESISTANCE & REACTANCE			

	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
7.1	Synchronous (Xd) - Sat & Unsat	VTA	Shall be advised after project award
7.2	Transient (X'd)	VTA	Shall be advised after project award
7.3	Sub transient (X''d)	VTA	Shall be advised after project award
7.4	Time constant of transient component (Td')	VTA	Shall be advised after project award
7.5	Subtransient reactance time constant (Td'')	VTA	Shall be advised after project award
7.6	Quadrature axis synchronous reactance (Xq)	VTA	Shall be advised after project award
7.7	Quadrature axis super transient reactance (Xq'')	VTA	Shall be advised after project award
7.8	Stator winding DC resistance (r1)	VTA	Shall be advised after project award
7.9	Time constant direct current (Ta)	VTA	Shall be advised after project award
7.10	Negative Sequence Reactance (X2)	VTA	Shall be advised after project award
7.11	Parallel Operation	Required	Shall be advised after project award
8.0	PHYSICAL CHARACTERISTICS		
8.1	GEG Set Container Dimensions (L x W x H) in mm	VTA	Shall be advised after project award
8.2	Total Weight of the GEG Set Container (kg)	VTA	Shall be advised after project award
8.3	Control Panel Dimensions (L x W x H) in mm	VTA	Shall be advised after project award
8.4	Control Panel IP Rating	VTA	IP42
8.5	Dimensions (L x W x H) in mm	VTA	Shall be advised after project award
8.6	Weight of Alternator (kg)	VTA	Shall be advised after project award
8.7	Weight of Engine (kg)	VTA	Shall be advised after project award
8.8	Overall Weight (kg)	VTA	Shall be advised after project award
8.9	Language on Labels, Manuals and Booklets	VTA	English
9.0	DEGREE OF PROTECTION		
9.1	Generator / Alternator	IP 23	Complied
9.2	Main Terminal Box	IP 23	Complied
9.3	Control Panel	IP 23	Complied
9.4	Generator Housing	IP 55 with TEFC enclosure (containerized)	Complied
10.0	CABLE DETAILS		
10.1	Power Connection cables Internal Cables: Cu/XLPE/PVC/PVC	XLPE Insulated, Copper Conductor	Complied
10.2	Cable entry	Bottom	Complied
11.0	PROTECTION		
11.1	Over current - voltage restraint (51/51V)	Required	Complied
11.2	Instantaneous Phase Over current (50)	Required	Complied

	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
11.3	Stator Earth fault (With Neutral CT) 51N	Required	Complied
11.4	Under voltage (27)	Required	Complied
11.5	Over voltage (59)	Required	Complied
11.6	Under frequency/Over frequency (81)	Required	Complied
11.7	Negative phase sequence (46)	Required	Complied
11.8	Reverse Power (32)	Required	Complied
11.9	Stator winding temperature (26)	Required	Complied
11.10	Bearing temperature (26)	Required	Complied
11.11	Phase sequence voltage relay (47)	Required	Complied
11.12	Local Emergency Stop (In Control Panel)	Required	Complied
11.13	Trip Supervision Relay	Required	Complied
11.14	Lockout Relay	Required	Complied
11.15	Control Circuit Supervision	Required	Complied
11.16	Other Protections	As per Vendor Standard Protection Scheme	Shall be evaluated during detailed design
11.17	The generator protection system and trip logic shall be in line with IEEE guidelines IEEE C37.101 and IEEE C37.102.	Compliance Required	Complied
12.0	ALARMS		
12.1	Stator winding temperature - high	Required	Complied
12.2	AVR [Auto Voltage Regulator] failure	Required	Complied
12.3	Control panel general	Required	Complied
12.4	Hardwired alarms - DG set minor trouble, majortrouble, battery charger trouble	Required	Complied
12.5	Bearing temperature - high	Required	Complied
12.6	Lock-out general (86)	Required	Complied
12.7	Under voltage relay (27)	Required	Complied
12.8	Under frequency relay (81)	Required	Complied
12.9	Over current Relay (51V)	Required	Complied
12.10	Starting battery voltage low	Required	Complied
12.11	DC power failure	Required	Complied
12.12	Incomer CB fault trip relay (86-1)	Required	Complied
12.13	Fuel low alarm level	Required	Complied
13.0	METERING		
13.1	Voltmeter	Required	Complied; Analog meter shall also be installed
13.2	Frequency	Required	Complied; Analog meter shall also be installed
13.3	kWH meter	Required	Complied
13.4	pf Meter	Required	Complied
13.5	Ammeter	Required	Complied; Analog meter shall also be installed
13.6	Running hour meter	Required	Complied
13.7	kW Meter	Required	Complied
13.8	kVAr Meter	Required	Complied
13.9	kVAH Meter	Required	Complied

	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
13.10	kVA Meter	Required	Complied
14.0	AC POWER DETAILS		
14.1	AC System Voltage	Required	Complied
14.2	Variation in Supply	Required	Complied
14.3	Short Circuit Level	Required	Complied
15.0	BATTERY CHARGER		
15.1	Battery charger	Required	Complied
15.2	Make	VTA	DEEPSEA
15.3	Model	VTA	DEEPSEA Charger
15.4	Input Voltage	230VAC	Complied
15.5	Float Voltage Range	VTA	Shall be provided during detailed design
15.6	Boost Voltage Range	VTA	Shall be provided during detailed design
15.7	Float charge current	VTA	Shall be provided during detailed design
15.8	Boost charge current	VTA	Shall be provided during detailed design
16.0	BATTERY		
16.1	Make	VTA	Shall be provided during detailed design
16.2	Model	VTA	Shall be provided during detailed design
16.3	Nominal voltage	12V	Complied
16.4	Nominal capacity	Vendor shall size	Shall be provided during detailed design
16.5	Dimension of Rack	VTA	Shall be provided during detailed design
17.0	F&G SYSTEM		
17.1	Flammable Gas Detector	Required	Complied
17.2	Flame Detector	Required	Complied
17.3	Temperature Detector	Required	Complied
17.4	F&G Control Panel alongwith Interface with Plant Control System & Gas Generator Control Panel	Required	Complied
18.0	Local Control Panel [Located inside the Generator Container]	Required	
18.1	Control, Protection, Metering, Interface: Electrical and Control System [Hardwired, RS485 & CAN bus]	Required	Complied
18.2	Gas Engine Driven Generators shall be interfaced to DCS and ESD system for monitoring, control and shutdown functions. Vendor shall provide hardwired and serial link interface signals for monitoring, control and shutdown functions. Interface with ESD shall be hardwired via Interposing Relay Panel. Redundant MODBUS interfacing shall be utilized for the serial communication signals.	Required	Complied
19.0	Remote Control Panel [Located inside the Package Container]	Required	

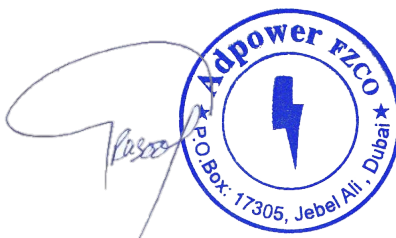

	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
19.1	Control, Interface: Control System Required (including control and monitoring equipment and engine measurements/controls) for all the components inside the Gas Generator Enclosure alongwith external fans through the HMI installed on the panel. Vendor shall furnish details, the panel shall be installed inside the substation. Vendor shall provide Redundant serial communication (RS485) for interface from Gas Generator Vendor provided LCP to Control system (UCP).	Required	Complied
20.0	Pressure Regulating Skid	Required	
20.1	Vendor shall design as per the Fuel Gas Inlet Pressure and Requirement of the Offered Unit	VTA	Complied
21.0	Accoustic Enclsoure	Required	Complied
22.0	AC Distribution Board [For Generator Package Internal Power Distribution]	Required	Complied
22.1	Form 2 IP42 415VAC 50Hz 10kAmp 1sec 3P+4W IEC 61439 RAL 7035	VTA	Complied
22.2	Panel Rated Current shall be as per the load requirement of the Generator Auxiliaries	VTA	Complied
23.0	Fire Protection System	Required	
23.1	Required (automatic fire protection system using CO2 as the extinguishing medium)	Required	Complied
24.0	Fuel Gas Composition	Compliance Required	
24.1	Component	Fuel Gas (mole fraction)	Complied
24.2	H2O	0.0000	Complied
24.3	Nitrogen	0.0024	Complied
24.4	CO2	0.0575	Complied
24.5	H2S	0.00005	Complied
24.6	Methane	0.8290	Complied
24.7	Ethane	0.0942	Complied
24.8	Propane	0.0143	Complied
24.9	n-Butane	0.0011	Complied
24.10	i-Butane	0.0008	Complied
24.11	n-Pentane	0.0001	Complied
24.12	i-Pentane	0.0001	Complied
24.13	n-Hexane	0.0000	Complied
24.14	Total	1	Complied
25.0	Emission Monitoring System		
25.1	PEMS for Exhaust	Optional Price shall be provided	Optional Price shall be provided
26.0	Inspection And Testing		
26.1	Insulation Resistance Tests	Required	Complied
26.2	Hydrostatic Testing	Required	Complied
26.3	Load Test	Required	During SAT
26.4	Dynamic Load Test	Required	During SAT
26.5	FAT: Factory Acceptance Test	Required	Complied
26.6	SAT: Site Acceptance Test	Required	Complied
27.0	SPARE PARTS & SPECIAL TOOLS		



	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
27.1	Pre-commissioning/Commissioning/Start up spares Vendor to provide, Start-up & Commissioning Spares: As recommended by Vendor with item wise quantity and price break up (To be ordered with the equipment). As a minimum shall include 200% gaskets & 10% bolting (minimum 2 nos. Bolts/4 nuts per size) shall be provided per gasketted internal & external joints (for nozzles with B/F).	Required	Refer to the commercial price for details. First Fill and commissioning spares are included in the offer.
27.2	Two Years Operation Spares	Optional Price shall be provided	Shall be Provided at a later stage
27.3	Special Tools and Tackles for Erection, Pre-commissioning, Commissioning & Operation (if applicable)	Vendor to Furnish	Special tools Not Required.
27.4	A list of special tools necessary to dismantle the GEG	Vendor to Furnish	Special tools Not Required.
28.0	OTHER REQUIREMENTS		
28.1	Guarantee / Warranty (Months)	12 Months after commissioning	12 Months after commissioning 18 Months from date of supply
28.2	Training Manual & Installation Operation, Maintenance Manuals	Required	Complied
28.3	Supervision for Commissioning at site	Per diem rates	
28.4	Delivery location	Construction Site, UAE	Jabel Ali Freezon duty price included in the offer
28.5	Delivery Duration from Purchase Order placed date	VTA	6 months from PO
28.6	Fabrication / Inspection & Test Location	Vendor to Furnish	Confirmed
28.7	Local Agent Details	Vendor to Furnish	ADPOWER
28.8	Vendor's Engineering & Procurement Location	Vendor to Furnish	Jabel Ali
28.9	Preservation	Preservation suitable for 6 months storage in marine, hot and humid saline atmosphere	Confirmed
28.10	Vendor shall supply Gas Engine Generator (including accessories) in assembled condition. Bidder to confirm.	Compliance Required	Confirmed
28.11	Painting As stated above, Before shipment, all equipment's and components of the unit shall be Facility Painted to international standards, marine grade suitable for humid, dusty and saline site conditions	Required	Confirmed
29.0	MISCELLANEOUS		
29.1	Foundation Load Data	VTA	After project award
29.2	Installation/fixing detail with Foundation	VTA	After project award



	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)		
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009	Rev.: A	
DATASHEET - GAS POWER GENERATOR			
Sr. No.	DESCRIPTION	Project Requirements	MOM 20241111 ASTRA ADPOWER
29.3	Documents Required with Offer Filled and Complied this Data Sheet Detailed Vendor Standard Datasheet of all components Vendor & Sub-Vendor List with port of origin Heat & Material Balance Diagram PID Equipment List Power Auxiliary List Consumption List Equipment Vendor Standard Catalogs MTC and Certificates Once technical closure is recieved signed stamped this datasheet	Vendor shall submit with Offer	Shall be submitted with revised offer with notes
29.4	Anchor Bolt	Required	Comply
29.5	Painting: As per Vendor Standard	VTA	Comply
29.6	Internal and External Earthing Container shall be provided with internal earthing with suitably designed earth bars alongwith earthing cables, point for generator star earthing, external enclosure earthing ensuring safe and reliable operation	Required	Comply
29.7	Auxiliary Load, kW	Required	Shall be confirmed after SCR load requirement
	VTA: Vendor to Advise [With Offer]		




	ADNOC GAS DBOOM WORKS FOR RENTAL COMPRESSION FACILITIES FOR BUHASA PLANT (PROJECT 5.0)				
	ADNOC DOCUMENT NO: DOD-30201-50150-BH-000-16-00-004 CONTRACTOR DOCUMENT NO: ADN-AEC-EL-DAT-009		Rev.: A		
DATASHEET - GAS POWER GENERATOR					
Emissions Data For Compliance					
Emission Limits for Combustion Unit below 10MW Total thermal input					
Sr. No.	Common Name	Chemical Symbol	Liquid Fuel	Fuel Gas or Natural Gas	ADPOWER Response 20241111
			Limit Value (mg/Nm3)	Limit Value (mg/Nm3)	
1	Oxides of Nitrogen	Nox	200	100 (Natural Gas) 200 (Fuel Gas)	Complied
2	Particulate Matter	PM	30	10	Complied
3	Sulphur Dioxide	SO2	350	35	Complied
4	Cabon Monoxide	CO	50	50	Complied

Note: Reference Conditions 273K, dry, 101.3kPa and 3% O2

